




20 years of experience
12 years product warranty

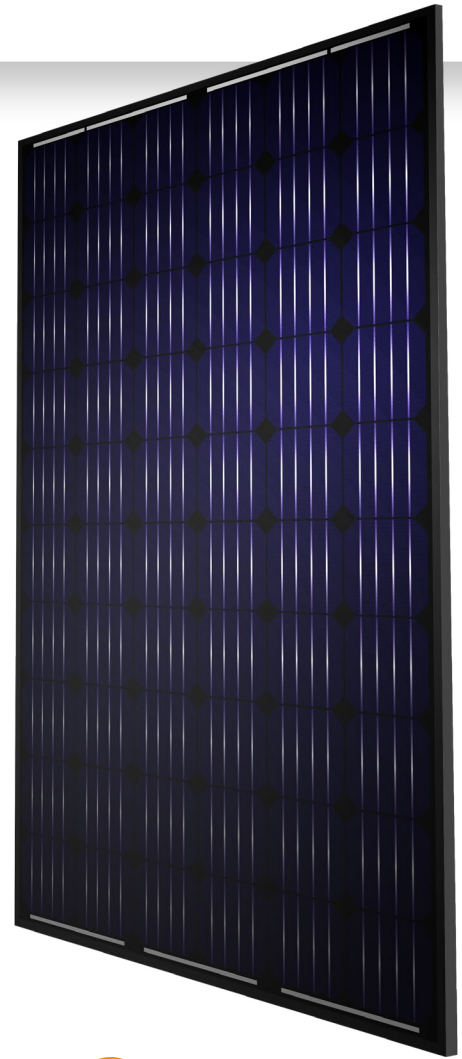

Quality

- / Subjected to test electroluminescence
- / IP65 + 1 m cable
- / High transmissivity glass and high resistance
- / Frame with higher mechanical strength and air chamber
- / Friendly environment & recyclable materials

Certificates

- / IEC 61215:2005
- / IEC 61730-1:2004 / IEC 61730-2:2004
- / Frontal load (snow) 5.400 Pa
- / Back load (wind) 2.400 Pa
- / Fire Resistance Certificate / Class II (under standard UNI 9177)
- / MCS (UK)
- / EE016-20130528-001 (France)
- / WEEE compliance in Germany
- / ETL Listed Mark (USA)

+3% Extra power
extra up to 3%
extra up to 7W

12 Warranty product
12 years for product
20 years of experience

25 Performance warranty
High performance
25 years of warranty

PHOTON Laboratory talks about our modules:

"Eurener is one of the oldest module manufacturers in Europe: the Spanish company was founded in 1997 [...] Is distinguished by having values that are over the average: the temperature coefficient is quite better than other modules that are in the test field. The curve behavior at different irradiance conditions shows a marked efficiency increase in radiations from medium to high, and a slight drop in efficiency at low irradiance conditions. These factors show that this module could reach higher performance than the average in long-term measurements."



TURBO

The most powerful module of the world / 300 - 315 w



★ ★ ★ ★
★ ★ ★ ★ EUROPEAN QUALITY
★ ★ ★ ★

eurener
energía solar



Technical features

Frame
Silver anodized aluminium 0,015 mm
Robust and resistant to corrosion
Built-in plug
Connection box
Sealed, robust and wide for heat dissipation
IP65 according to IEC 60529
Diodes by-pass built-in (6) for protection of the partial shading
Connector MC4 or compatible, easy and rapid connection
Cables 1 meter length and 4mm ² section
Reaction to Fire Class II (conformity to UNI 9177 norm)
Frontal
3,2 mm tempered glass
Textured, extra-clear with low iron content
Solar cells
60 cells monocrystalline silicon / 156x156 mm
Weight and dimensions (L x W) +/-1% mm
20 Kg 1640/50 x 992 x 35/40 mm

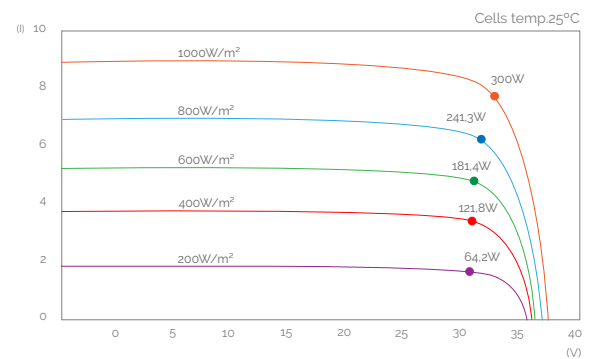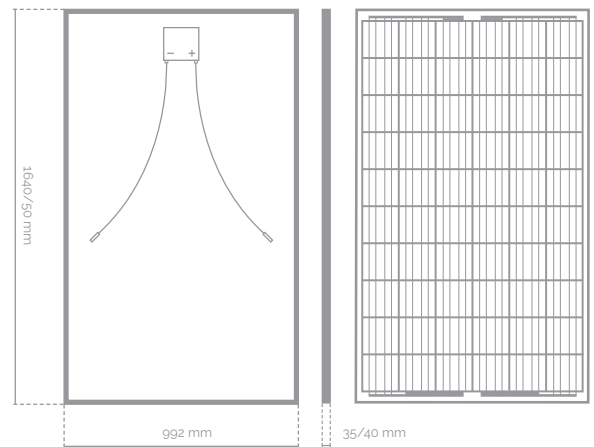

Electric data

	TURBO300 / Standard - Black	TURBO310 / Standard - Black	TURBO315 / Standard - Black
Nominal power, P _{mpp}	300 W	310 W	315 W
Tolerance, P _{mpp}	± 3%		
Area of the module	1,62		
Module efficiency	18,45%	19,09%	19,39%
I _{sc}	9,63 A	9,86 A	9,92 A
U _{oc}	40,71 V	39,21 V	41,21 V
I _{mpp}	9,11 A	9,62 A	9,71 A
U _{mpp}	32,94 V	32,29 V	32,48 V
Maximum voltage	1000 V		
α I _{sc}	0,050% / °C		
β U _{oc}	- 0,334% / °C		
γ P _{max}	- 0,445% / °C		
Temperature range	- 40°C to +85°C		
NOCT	44°C ± 2°C		

NOTE: Read the instruction manual of this product and follow the indications. Values are valid for: 1000W/m², AM 1.5 and cell's temperature of 25°C. All the information of this brochure may be amended without notice by Eurener.

Sales Office:
Av. Marqués de Sotelo, 1-4^a
46002 Valencia (Spain)

Tel. +34 96 004 55 15
comercial@eurenergroupp.com

